


# 型号 ATT-80W

## 中功率固定同轴衰减器

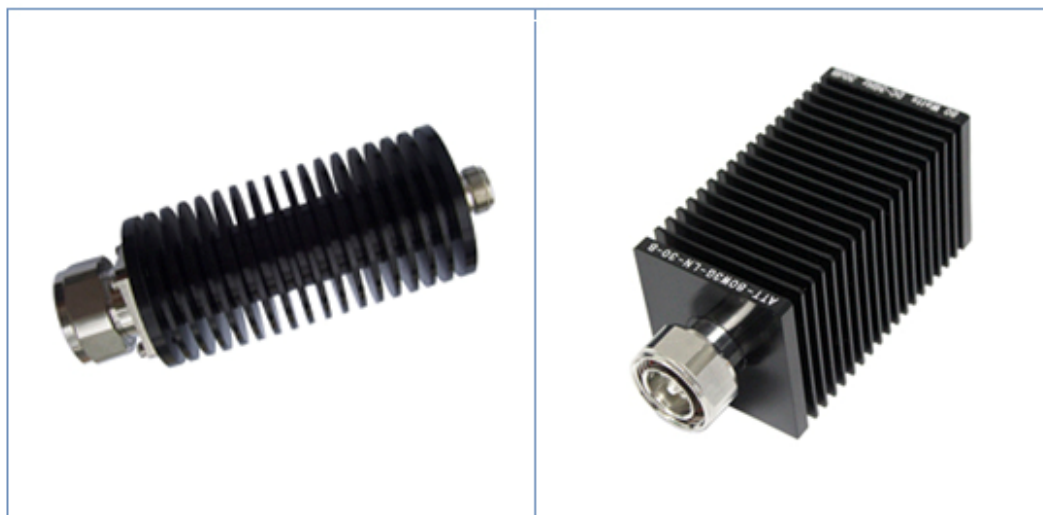

### 电气参数:

- ◇ 额定功率: 80W
- ◇ 频率: DC to 3GHz
- ◇ 衰减值: 1dB to 60dB
- ◇ 阻抗匹配: 50Ω
- ◇ 温度范围: -55° C to +100° C
- ◇ 高性能连接器
- ◇ 低互调失真

该产品目录介绍了80W固定同轴衰减器的外观、电气特性、尺寸、连接器等信息，通过此目录，您可以快速准确的找到您所需要的产品。

[WWW.GEMSRF.COM](http://WWW.GEMSRF.COM)

# 固定同轴衰减器


## 尺寸参考图:



### Case Style A

#### NOTES:

- 1. Rating Power: 80W
- 2. Frequency: DC-3GHz
- 3. Attenuation: 1-60dB
- 4. VSWR: <1.20:1
- 5. Impedance: 50Ω
- 6. Connector: L29J-NK
- 7. Weight:
- 8. Units: mm
- 9. Tolerance: ±2mm

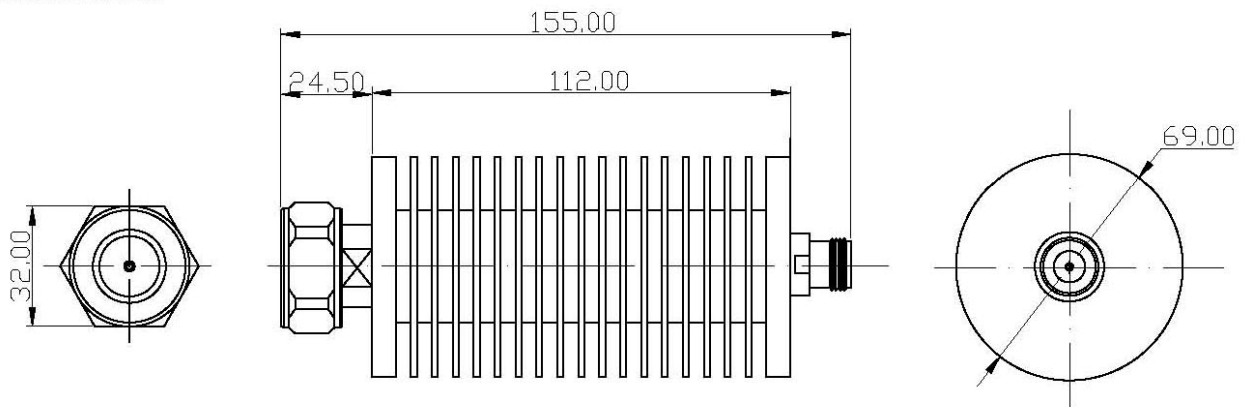

GEMS RF & MICROWAVE CO., LTD.  
PHONE (86) 75529110700 FAX (86) 75529644383-816  
WWW.GEMSRF.COM  
E-MAIL: SALES@GEMSRF.COM

MODEL	Drawing date
ATT-80W3G-LN-30-A	2012.03.19


NOTES:  
▶ UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL;  
▶ ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.




### Case Style B

**NOTES:**

1. Rating Power: 80W
2. Frequency: DC - 3GHz
3. Attenuation: 1 - 60dB
4. VSWR: <1.20:1
5. Impedance: 50Ω
6. Connector: L29J-NK
7. Weight:
8. Units: mm
9. Tolerance: ±2mm

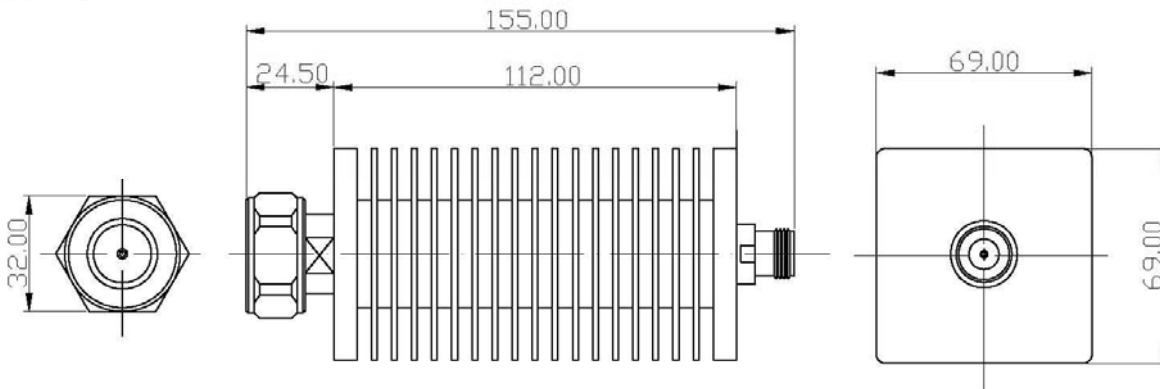


		GEMS RF & MICROWAVE CO., LTD. PHONE (86) 75529110700 FAX (86) 75529644383-816		
		WWW.GEMSRF.COM E-MAIL: SALES@GEMSRF.COM		
MODEL	ATT-80W3G-LN-30-B		Drawing date	2012.03.19
NOTES: ▶ UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL; ▶ ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.				

# 固定同轴衰减器



## 测试报告:

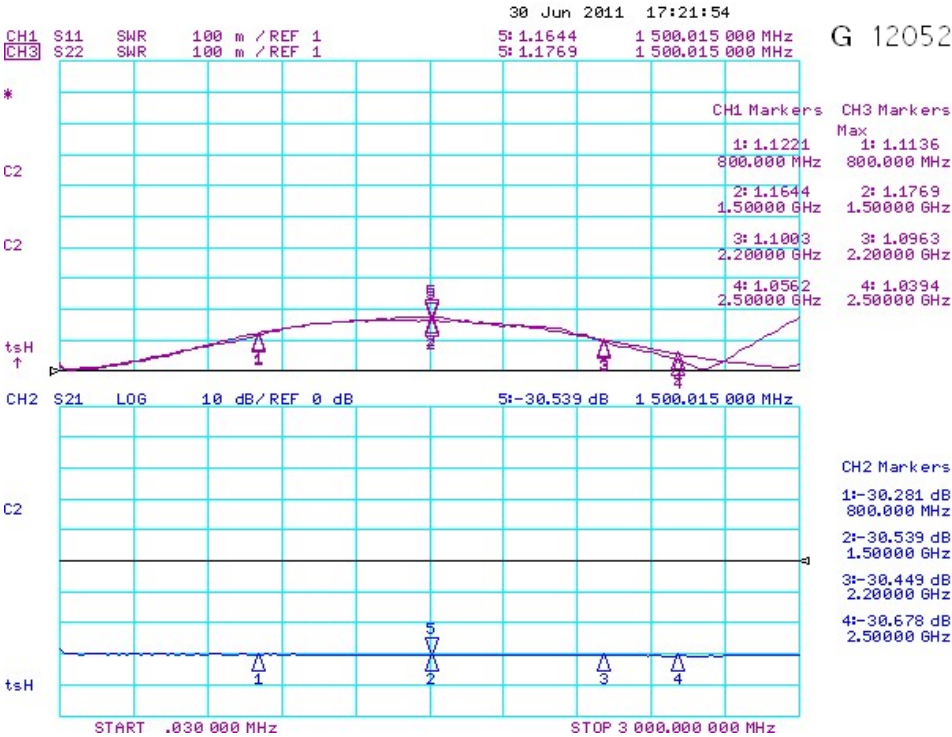

## 产品型号命名规则:

型号	频率	最大驻波比	衰减精度	连接器 输入/输出	外观
ATT-80W3G-LN-30-A	Dc to 3000MHz	1.20:1	+/- 0.5dB	L29 Male/N Female	A
ATT-80W3G-N-30-A	Dc to 3000MHz	1.20:1	+/- 0.5dB	N Male/N Female	A
ATT-80W3G-LN-30-B	Dc to 3000MHz	1.20:1	+/- 0.5dB	L29 Male/N Female	B
ATT-80W3G-N-30-B	Dc to 3000MHz	1.20:1	+/- 0.5dB	N Male/N Female	B

除以上型号外, 可根据要求定制。

产品型号: ATT-80WXG-XX-XX-A

### ATT-80WXG-XX-XX-A

Product Name:  
Attenuator

Power Rating

Frequency:  
1-1G 2-2G 2.5-2.5G 3-3G  
4-4G 6-6G

RF Connector:  
N-N Male input,N Female output  
NJ-N Male input,N Male output  
NK-N Female input,N Female output  
SS-Specify your request in your order

Attenuation:  
XX=1-60

Outlooking:  
A-Case Style A-Circle  
B-Case Style B-Square